

## FEATURES



### Data

### Transmission



### EDS2 Sensors



smart, interlinkable pressure and temperature sensors

### Adjustment/Calibration

autonomous in sensor, connectable to any smart memo

### Touchscreen

signature directly on the display



**Battery** rechargeable and integrated – Lithium Ion



### Operating Time

max. 200 h  
operation and charging possible at the same time



### Intuitive Esders Operation



### IP67


protection code: splash protection, dust protection, shock-protected



## OPERATION




# smart memo

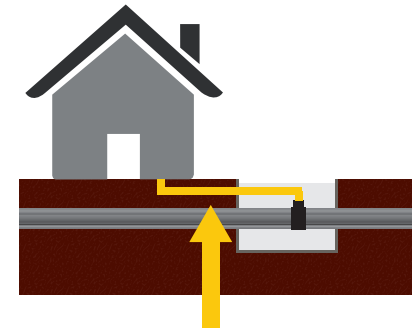

**0 - 10 bar**  
Gas service line

#### in use:


- smart memo
- KK60
- EDS2

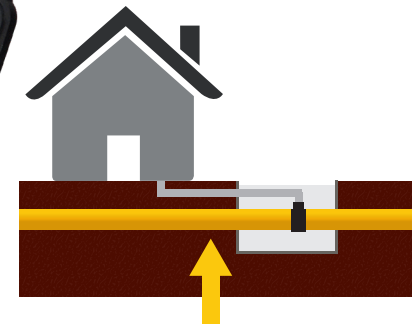

**0 - 10 bar**  
Gas supply line

#### in use:

- smart memo
- temperature sensor
- EDS2

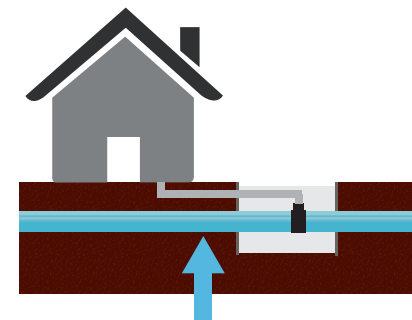

**0 - 25 bar**  
Water supply line

#### in use:

- smart memo
- MPP
- EDS2